Technical Product Sheet


BV10NPA-2366V-PN10/PN16 - Electric 110/240V AC

Wafer type butterfly valve, mounting beween flanges PN10/PN16, with electric actuator
Face to Face Standard: EN 558-1 Table 1 series 20

The actuator is selected for 20°C water with a pressure drop of 6 bar and minimum 1 cycle per week - 110/240V AC



Item Number	Belven Ref.
10HCD116VXVV0050	BV10NPA-2366V-PN10-DN050 - VB015 110/240VAC
10HCD116VXVV0065	BV10NPA-2366V-PN10-DN065 - VB030 110/240VAC
10HCD116VXVV0080	BV10NPA-2366V-PN10-DN080 - VB030 110/240VAC
10HCD116VXVV0100	BV10NPA-2366V-PN10-DN100 - VB060 110/240VAC
10HCD116VXVV0125	BV10NPA-2366V-PN10-DN125 - VB110 110/240VAC
10HCD116VXVV0150	BV10NPA-2366V-PN10-DN150 - VB110 110/240VAC

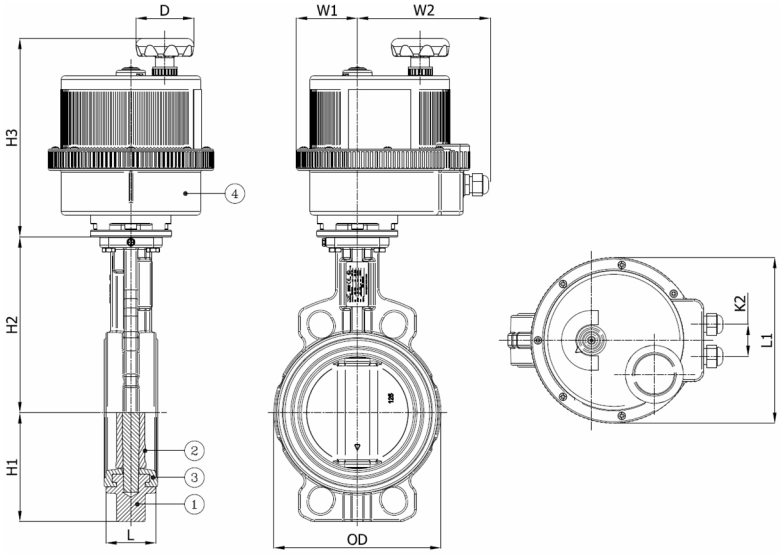

DN/Size	L	H1	H2	H3	OD	L1	W2	W1	D	K2	Press.Cl.	Weight(kg)
DN050 (2")	43	65	143	148,5	96	123	120,5	42,5	68	32	PN10	4.70
DN065 (2 1/2")	46	71	155	195	110	157	129,5	60,5	65	36	PN10	6.40
DN080 (3")	46	77	162	195	124	157	129,5	60,5	65	36	PN10	6.60
DN100 (4")	52	107	181	222	148	185	146,5	67,5	65	36	PN10	8.90
DN125 (5")	56	122	197	232,1	180	211	153	84	110	40	PN10	12.20
DN150 (6")	56	150	210	232,1	206	211	153	84	110	40	PN10	13.10

Item 1	Item 2	Item 3	Item 4
Body Material	Seat Material	Disc Material	Actuator Material
Cast iron : GG25 + Epoxy coating	VITON	Stainless steel : CF8M	Self-extinguishing polymer

Belven N.V.
Blokhuisstraat 24 | 2800 Mechelen | Belgium
Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com

We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.