
Technical Product Sheet

BV49-3434E-F4-PN16 - ISO

Gate valve, flanged PN16, resilient seated, F4 short face to face, bare shaft with ISO 5211 flange for automation
Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref.
493444E0050	BV49-3434E-F4-PN16 DN050 - BARE SHAFT
493444E0065	BV49-3434E-F4-PN16 DN065 - BARE SHAFT
493444E0080	BV49-3434E-F4-PN16 DN080 - BARE SHAFT
493444E0100	BV49-3434E-F4-PN16 DN100 - BARE SHAFT
493444E0125	BV49-3434E-F4-PN16 DN125 - BARE SHAFT
493444E0150	BV49-3434E-F4-PN16 DN150 - BARE SHAFT
493444E0200	BV49-3434E-F4-PN16 DN200 - BARE SHAFT
493444E0250	BV49-3434E-F4-PN16 DN250 - BARE SHAFT
493444E0300	BV49-3434E-F4-PN16 DN300 - BARE SHAFT

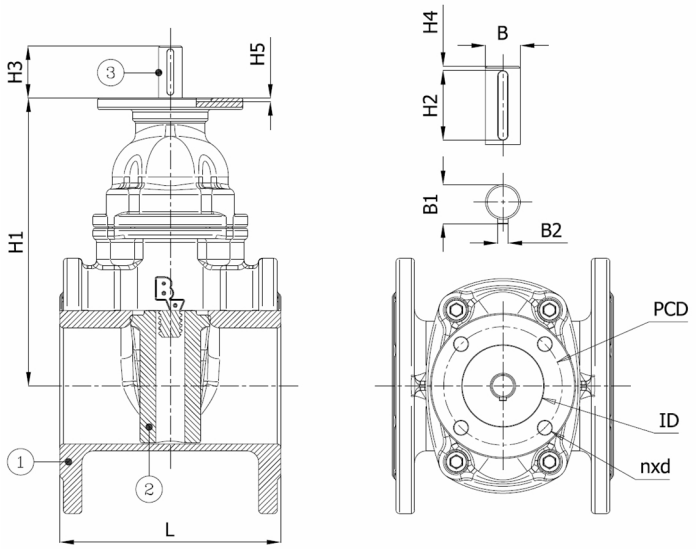

DN/Size	L	H1	H2	H3	H4	PCD	B	B1	B2	ID	H5	ISO	n x d	Press.Cl.	Weight(kg)
DN050 (2")	150	320	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	11.00
DN065 (2 1/2")	170	335	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	14.00
DN080 (3")	180	370	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	17.00
DN100 (4")	190	420	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	21.00
DN125 (5")	200	480	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	29.00
DN150 (6")	210	520	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	38.00
DN200 (8")	230	620	55	65	5	140	30	32	8	100	4,5	F14	4 x d18	PN16	58.00
DN250 (10")	250	720	55	65	5	140	30	32	8	100	4,5	F14	4 x d18	PN16	90.00
DN300 (12")	270	780	55	65	5	140	30	32	8	100	4,5	F14	4 x d18	PN16	120.00

Belven N.V.
Blokhuisstraat 24 | 2800 Mechelen | Belgium
Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com

We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.